


SE364TDAU

Hob, Universale, Ceramic, 60 cm, Ultra-low profile or Fully Flushed

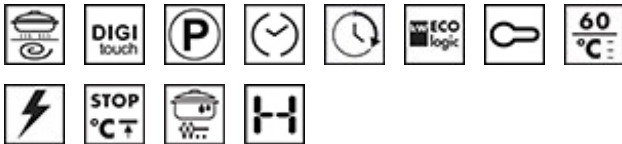

TYPE

Product Family: Hob • Dimensions: 60 cm • Type: Ceramic • Built-in type: Ultra-low profile or Fully Flushed • Power supply: Electric • EAN code: 8017709265755

AESTHETICS

Colour: Black • Finishing: Glass • Aesthetics: Universale • Material: Glass • Glass type: Ceramic • Type of control setting: Touch controls • Control knob position: Front • Glass edge: Straight edge • Serigraphy colour: Grey

PROGRAMS / FUNCTIONS

Total no. of cook zones: 4 • No. of ceramic cook zones: 4 • No. of cooking zones with booster: 4 • Main on/off switch: Yes • Power levels: 9

OPTIONS

Standard cut out: 490x560 mm • End cooking timer: 4 • Minute minder: 1 • End of cooking alarm: Yes • Residual time indicator: Yes • Limited Power Consumption Mode: Yes • Limited Power Consumption Mode in W: 2800, 4000 W • Showroom Demo Option: Yes • Control Lock / Child Safety: Yes • Keep warm automatic function: Yes • Quick start: Yes

COOKING ZONES

1st zone position: Front-left • 2nd zone position: Rear-left • 3rd zone position: Rear-right • 4th zone position: Front-right • 1st zone type: Ceramic - Single • 2nd zone type: Ceramic - Single • 3rd zone type: Ceramic - Single • 4th zone type: Ceramic - Single • 1st zone dimensions: Ø 18.4 cm • 2nd zone dimensions: Ø 14.8 cm • 3rd zone dimensions: Ø 18.4 cm • 4th zone dimensions: Ø 14.8 cm • 1st zone power: 1.80 kW • 2nd zone power: 1.20 kW • 3rd zone power: 1.80 kW • 4th zone power: 1.20 kW

TECHNICAL FEATURES

Automatic switch off when overheat: Yes • Automatic switch off when overflow: Yes • Residual heat indicator: Yes

PERFORMANCE / ENERGY LABEL

2nd zone energy consumption: 161.2 Wh/Kg • Energy consumption zone 3: 181 Wh/Kg • Energy consumption zone 4: 161.2 Wh/Kg

ELECTRICAL CONNECTION

Electrical connection rating (W): 6000 W • Voltage (V): 220-240 V • Frequency (Hz): 50/60 Hz • Type of electric cable: Double phase • Power supply cable length: 150 cm

LOGISTIC INFORMATION

Dimensions of the product (mm): 50x600x510 • Depth (mm): 510 mm • Width (mm): 600 mm • Product Height (mm): 50 mm

